



Optical 4 port KVM Receiver (DTD-4KVM-02)
Optical KVM Transceiver (DTD-KVMTX-01)
Commercial Optical KVM Transceiver (DTD-KVMTX-01)

Key Features

- Supports up to 4 workstations
- Easily visible LED indicators
- Customizable to fit individual company needs



The KVM transceivers and receiver products are fully isolated and provide the end user a customizable solution for connectivity of multiple computing setups that will enhance daily functions.


The receiver buttons are easily accessible and allow users to manage workstations independently. Each unit is equipped with illuminated LED indicators to give the added benefit of knowing which workstation is active or inactive.

The KVM products are lightweight and small to allow installations to be easy and hassle free.

Contact Us

CIS Secure Computing, Inc.
21050 Ashburn Crossing Drive
Suite 145
Ashburn, VA 20147

Phone: (703) 996-0500
Fax: (703) 996-1111
eFax: fax@cissecure.com
Website: <http://www.cissecure.com>

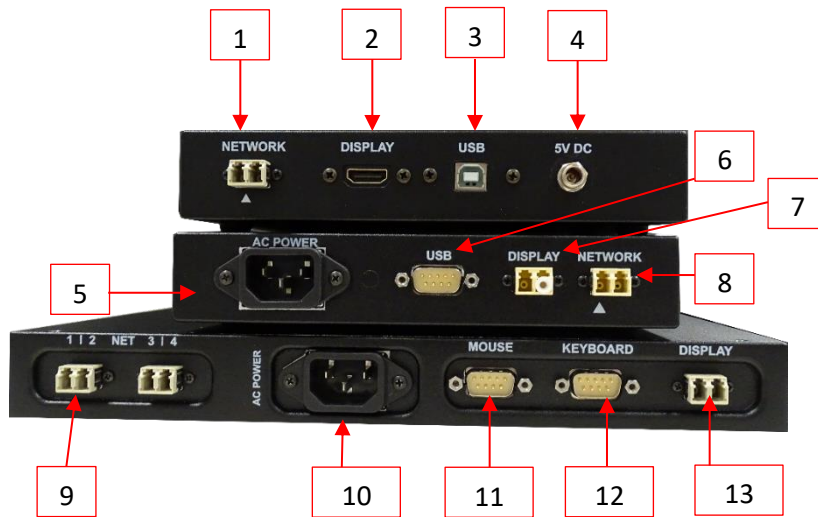

Ports

DTD-KVMTX-01 (non-secure transceiver)

- 1-LC Network
- 2-Display port
- 3-USB
- 4-5V DC power

DTD-KVMTX-01 (secure transceiver)

- 5-AC Power (must use CIS approved power cable CIS3A4-3)
- 6-DE9 USB
- 7-LC Fiber Display
- 8-LC Network

DTD-4KVM-02 (secure receiver)

- 9- LC Fiber Network (1,2,3,4)
- 10- AC Power (must use CIS approved power cable CIS3A4-3)
- 11- DE9 Mouse
- 12- DE9 Keyboard
- 13- LC Fiber Display

Buttons	Buttons 1,2,3,4 to operate individual workstations	
Power	DTD-KVMTX-01	DC 100-240V 50/60 Hz 4A
	DTD-4KVM-02	AC 115-250V 50/60 Hz 6A
Temperature	32°F to 113°F (0°C to 45°C) Operational -4°F to 158°F (-20°C to 70°C) Non-Operational	
Humidity	10% to 90% relative non-condensing	
Dimensions (H x W x D)	DTD-KVMTX-01	1.48" x 7.25" x 8.22"
	DTD-4KVM-02	1.48" x 11.25" x 10.29"
Weight	DTD-KVMTX-01	2.5 lbs
	DTD-4KVM-02	3.0 lbs
Warranty	Standard 1-year parts and labor Optional 3 years parts and labor	