

# TSG Power Injector Rack Mount and Power Supply



## Benefits

Supports up to 12 CIS Class A power injectors (not included)


Can be located up to 100m from phones in the same classification area

Consolidates Class A Approved 10/100/1000 power injectors using a single power supply for clean PoE desktop deployments.


## Product Overview

The CIS Secure DTD-RACK-PI-XX is designed for use with the VoIP Power Injector. The rack holds up to 12 power injectors at a time. The DTD-RACK-PI-XX is used for the CIS Class A Approved devices only. VoIP devices must be approved for the use with DTD-VOIP-PI-02. The rack is available with redundant power supply (optional).

The CIS Secure DTD-VOIP-PI-02 mounts easily into the DTD-RACK-PI-XX using a blind mate power connector and is held in place by the removable front bracket.

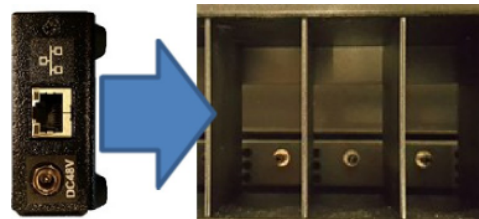

## Architecture

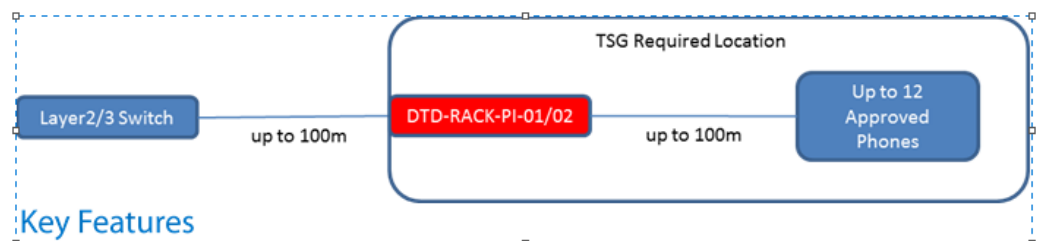

## Key Features

✉ [sales@cissecure.com](mailto:sales@cissecure.com)

☎ 703-996-0500



# TSG Power Injector Rack Mount and Power Supply



## Product Specifications

Part #:	DTD-RACK-PI-01 (VoIP Power Injector Rack with Power Supply) DTD-RACK-PI-02-2 (VoIP Power Injector Rack with Redundant Power) DTD-VOIP-PI-02-NPS (Power Injector with No Power Supply)
Power:	90-220 VAC (autosensing) 350 W max (power supply) 700W max (power supply with redundant power)
Dimensions (H x W x D):	3.5" x 19" x 11" (8.89cm x 48.26cm x 27.94cm)
Weight:	4 lbs (Empty)
Temperatures:	Operating: 4°F to 95°F (5° to 35°C) Non-operating: -13°F to 140°F (-25° to 60°C)
Humidity:	10% to 90% relative non-condensing
Warranty	Standard 1 year parts and labor Optional 3 years parts and labor



\*\* DTD-VOIP-PI-02